

# ATTRAKT<sup>TM</sup> H<sub>2</sub>O



## IP65 Outdoor Lighting System





H<sub>2</sub>O is an innovative 48V exterior (IP65) track lighting system that can be installed in humid and wet environments.

- The track itself can function as an independent diffused linear lighting system or as a base to provide power for a variety of plug-in luminaires.
- The diffused linear base is 213Lm/pf with a max fixture load of 43W/pf.
- The luminaires can be positioned any where along the track and can be moved several times without compromising the integrity of the IP65 rating.
- The profile is made of black anodized aluminum with painted side covers and end caps.
- Can be suspended, recessed or surface mounted

### How to Specify

- 1 Specify the diffused track base
- 2 Specify the luminaires
- 3 Select the corner connectors based on the mounting and shape
- 4 Calculate the total wattage (track base + fixtures). Quantity and size of drivers will be determined by the factory.

### IP65 Diffused Linear Track Base

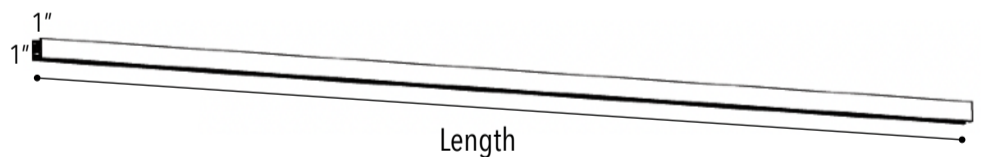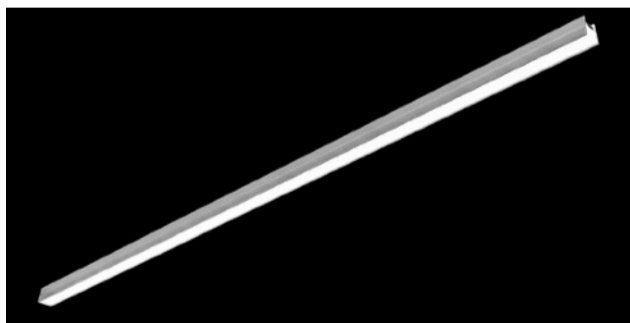

Power: 3W/F / 66LM/W / 198LM/F (Delivered lumens based on 3000K)  
 Class III  
 90 CRI

Series	Shape	Mounting		Ceiling Canopy	Overall Length	CCT
H <sub>2</sub> O	<b>SR</b> Straight Run <b>SQ</b> Square/Rectangle Shape <b>CS<sup>1</sup></b> Custom Shape	<b>P</b> Pendant <b>S</b> Surface <b>R</b> Recessed	<i>Leave blank if surfaced or recessed mounted</i> <b>SM</b> Stem Mounted # 3" / 6" / 12" <b>AC</b> Suspended w/ AC Cable # Specify Length	<b>SC</b> Surface Canopy <b>RM</b> Remote Driver	___" <i>Straight run only</i> ___" X ___" X ___" X ___" Specify total length of each straight run after each corner connector. **Lengths must be in whole numbers**	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K

Finish	Control	Input Voltage
<b>BK</b> Black <b>WH</b> White	<b>Non</b> Non Dimming <b>ELV</b> ELV/Triac <b>D10</b> 0-10V <b>DAL</b> Dali	<b>120V</b> <b>277V</b>

<sup>1</sup>Create custom shapes with 90° corners





# ATTRAKT<sup>TM</sup> H<sub>2</sub>O

# BINA<sup>TM</sup> COMPANY

IP65 Luminaires

SPOTS

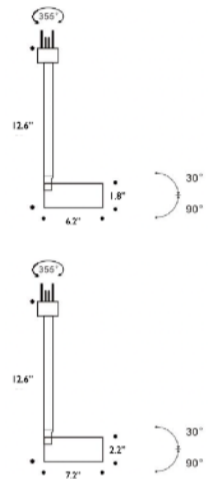

90 CRI



Spot		Mounting		Optic		CCT		Finish		Control	
<b>S45</b>	8W / 540Lm	<b>SH</b>	Short 2.6"	<b>24D</b>		<b>27K</b>	2700K	<b>BK</b>	Black	<b>ND</b>	Non Dimming
<b>S55</b>	16W / 904Lm	<b>LG</b>	Long 124"	<b>38D</b>		<b>30K</b>	3000K	<b>WH</b>	White	<b>ELV</b>	ELV/Triac
						<b>35K</b>	3500K	<b>BR</b>	Brown	<b>D10</b>	0-10V
						<b>40K</b>	4000K	<b>GR</b>	Grey	<b>DAL</b>	Dali





# ATTRAKT<sup>™</sup> H<sub>2</sub>O


# BINA<sup>™</sup> COMPANY

IP65 Luminaires

## GRILLE

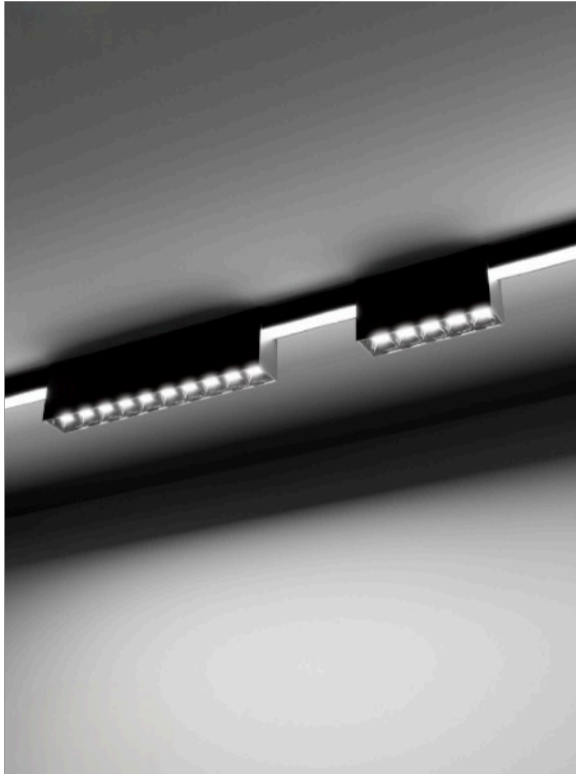

90 CRI



Grille	CCT	Optic	Finish	Control
<b>GR10</b> 5.6" / 10W / 700Lm	<b>27K</b> 2700K	<b>15D</b>	<b>BK</b> Black	<b>ND</b> Non Dimming
<b>GR20</b> 10.8" / 20W / 1400Lm	<b>30K</b> 3000K	<b>30D</b>	<b>WH</b> White	<b>ELV</b> ELV/Triac
<b>GS6</b> 4" / 6W / 420Lm	<b>35K</b> 3500K	<b>45D</b>	<b>BR</b> Brown	<b>D10</b> 0-10V
<b>GS12</b> 5.9" / 12W / 840Lm	<b>40K</b> 4000K		<b>GR</b> Grey	<b>DAL</b> Dali






# ATTRAKT<sup>TM</sup> H<sub>2</sub>O

# BINA<sup>TM</sup> COMPANY

IP65 Luminaires

## PENDANTS

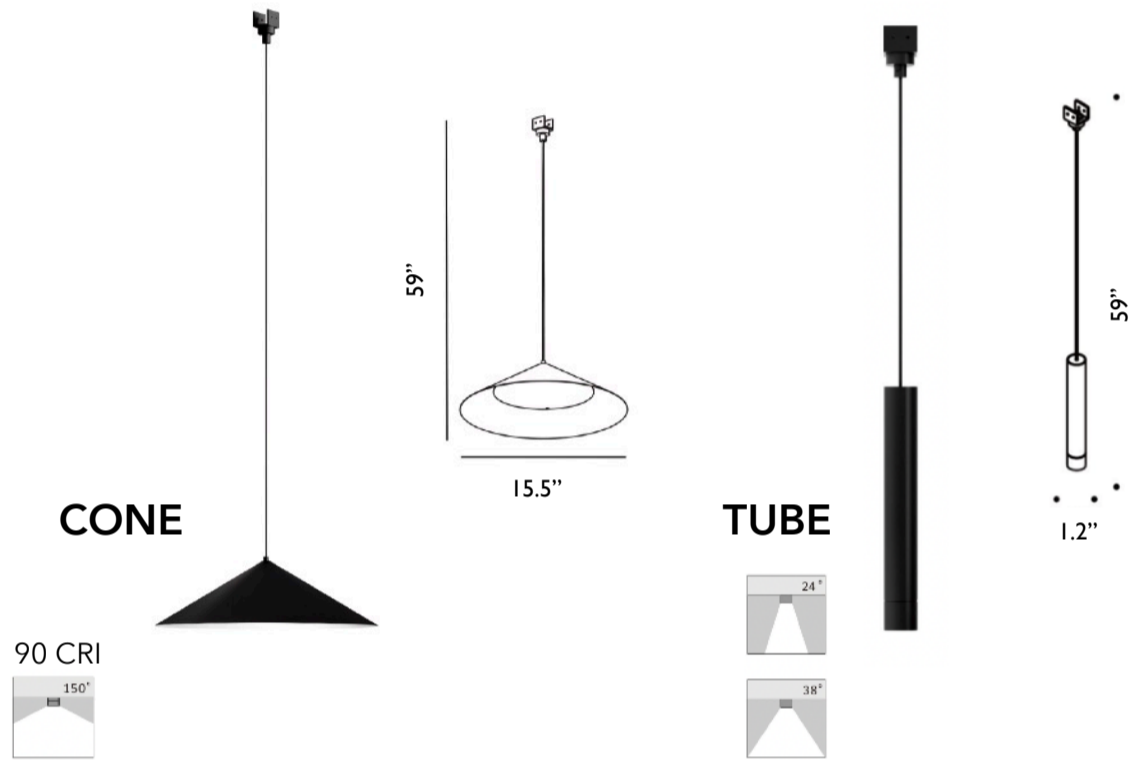

Pendants	CCT	Optic	Finish	Control
<b>TUBE</b> 5.6" / 8W / 540Lm	<b>27K</b> 2700K	<b>24D</b> TUBE	<b>BK</b> Black	<b>ND</b> Non Dimming
<b>CONE</b> 15" / 12W / 760Lm	<b>30K</b> 3000K	<b>38D</b> TUBE	<b>WH</b> White	<b>ELV</b> ELV/Triac
	<b>35K</b> 3500K	<b>150D</b> CONE	<b>BR</b> Brown	<b>D10</b> 0-10V
	<b>40K</b> 4000K		<b>GR</b> Grey	<b>DAL</b> Dali






# ATTRAKT<sup>TM</sup> H<sub>2</sub>O

# BINA<sup>TM</sup> COMPANY




**IP65 Luminaires**

## GLOBE



Globe		CCT		Finish		Control	
G6	6.5" / 9W / 420Lm	27K	2700K	BK	Black	ND	Non Dimming
G8	8.5" / 9W / 420Lm	30K	3000K	WH	White	ELV	ELV/Triac
		35K	3500K	BR	Brown	D10	0-10V
		40K	4000K	GR	Grey	DAL	Dali

## TAG




TAG		CCT		Optic	Finish		Control	
TGR	RD / 16W / 967Lm	27K	2700K	15D	BK	Black	ND	Non Dimming
TGS	SQ / 16W / 828Lm	30K	3000K	30D	WH	White	ELV	ELV/Triac
		35K	3500K	45D	BR	Brown	D10	0-10V
		40K	4000K		GR	Grey	DAL	Dali

# ATTRAKT<sup>TM</sup> H<sub>2</sub>O

# BINA<sup>TM</sup> COMPANY

**IP65 Luminaires**


**ROPE**

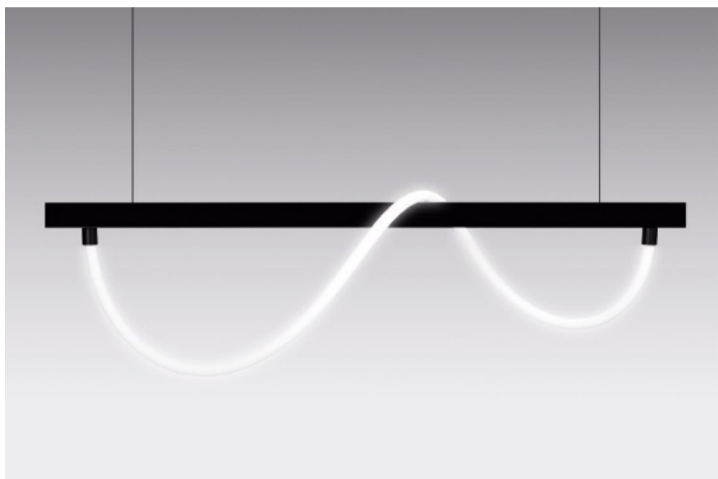


90 CRI

Rope		CCT		Finish		Control	
<b>RP</b>	10' / 50W / 3000Lm	<b>27K</b>	2700K	<b>BK</b>	Black	<b>ND</b>	Non Dimming
		<b>30K</b>	3000K	<b>WH</b>	White	<b>D10</b>	0-10V
		<b>35K</b>	3500K				
		<b>40K</b>	4000K				


**Corners**




STRAIGHT




90 DEGREE L CORNER



T- CORNER



CROSS - CORNER



INSIDE - CORNER

Connectors		Quantity		Finish	
<b>SC</b>	Straight Connector	<b>#</b>	QTY	<b>BK</b>	Black
<b>LC</b>	L Corner			<b>WH</b>	White
<b>CC</b>	Cross Corner				
<b>TC</b>	T Corner				
<b>IN</b>	Inside Corner				