


LINX

BINA COMPANYTM

ATTRAKT Lighting System

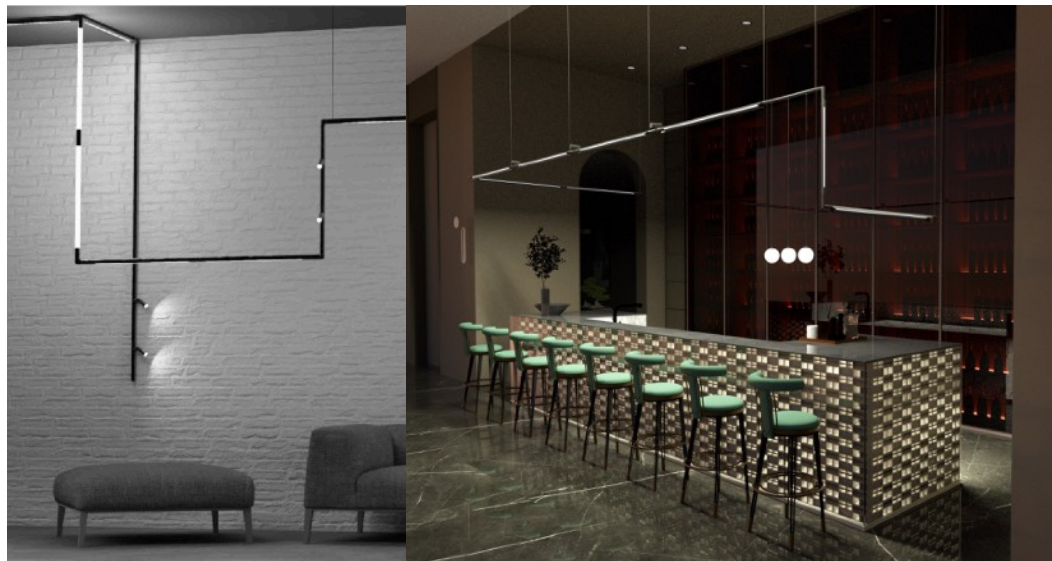

Linkable Lighting System

LINX is a versatile 48V linkable system that can be mounted on the ceiling, wall or floor.

LINX segments can be rotated 360 degrees.

Mix and match segments with luminaires to create a unique design.

LINX is fully customizable and can produced to specific size run lengths.



SPECIFICATIONS

HOW TO SPECIFY

- 1** Specify the application and mounting.
- 2** Specify the segments and luminaires.
- 3** Specify the connector type needed and quantity. If you prefer this to be done by the factory, please provide RCP and/or drawings.
- 4** For complex or patterned runs, please provide a drawing of the design and full layout.
- 5** Calculate total wattage. The factory will determine the size and quality of drivers.

Series	Application	Mounting	Ceiling Canopy	Input Voltage
LINX	C Ceiling	SM Stem Mounted # 2" / 4.5"/Custom	RC² Recessed Driver	120V
	W Wall	AC Suspended w/ AC Cable # Specify Length	SC³ Surface Canopy	
	W2C Wall to Ceiling	DR Direct to Ceiling or Wall	RM⁴ Remote Driver	
	ML¹ Multiple Levels			

¹Provide RCP/Drawings showing layout and design
²Driver can be recessed in the ceiling and accessible from below.
³Driver can be housed in the canopy.
⁴Driver will be installed remotely (up to 50' away).





LINX

BINA COMPANYTM


ATTRAKT Lighting System

SEGMENTS

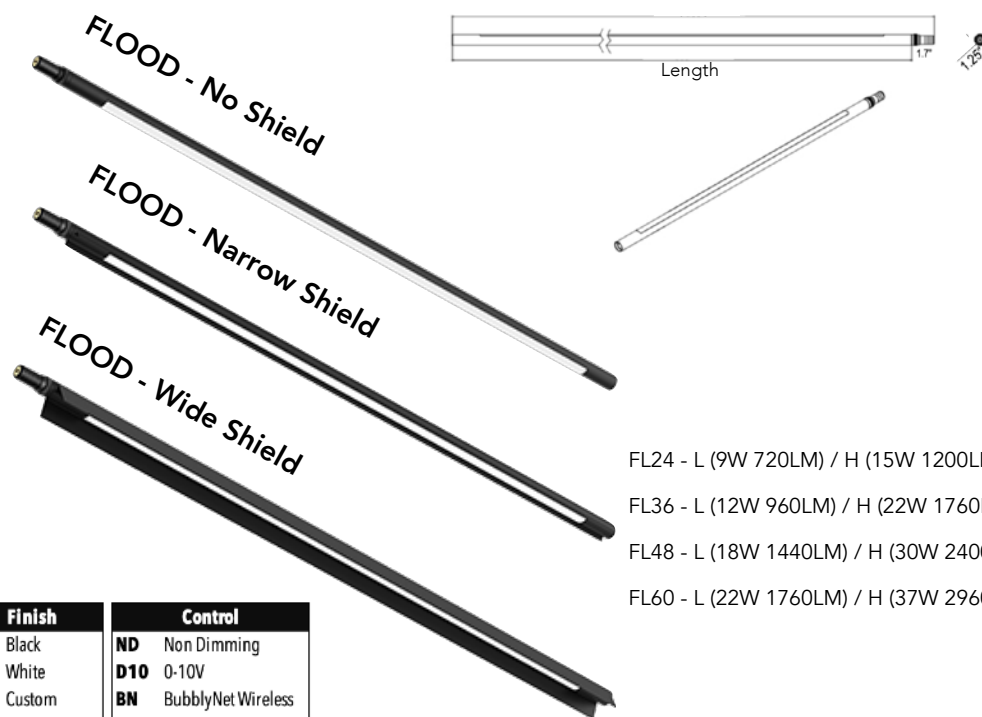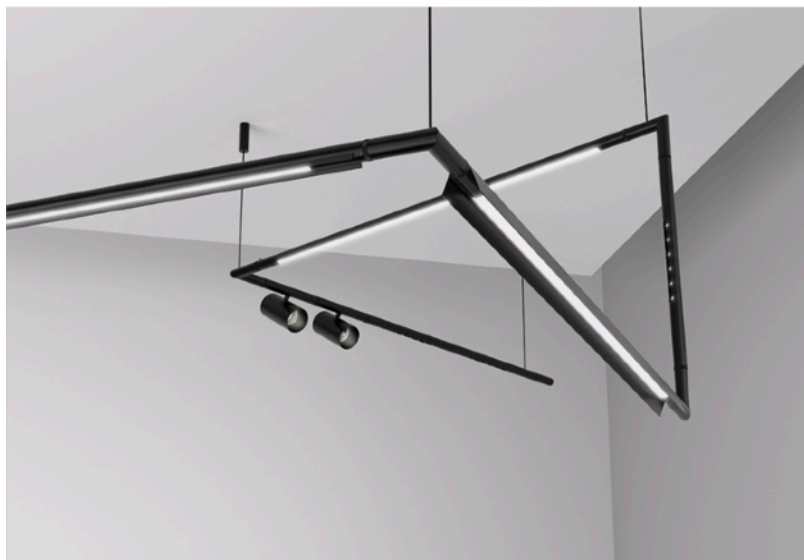

FL24 - L (9W 720LM) / H (15W 1200LM)
 FL36 - L (12W 960LM) / H (22W 1760LM)
 FL48 - L (18W 1440LM) / H (30W 2400LM)
 FL60 - L (22W 1760LM) / H (37W 2960LM)

Flood	Diameter	Shield	Output	CCT	Optic	Finish	Control
FL24 24"	LRG Large 1.25"	No Shield	L Low	27K 2700K	120 120 Degree	BK Black	ND Non Dimming
FL36 36"		NS Narrow Shield	H High	30K 3000K		WH White	
FL48 48"		WS Wide Shield		35K 3500K		RAL Custom	
FL# Custom				40K 4000K			

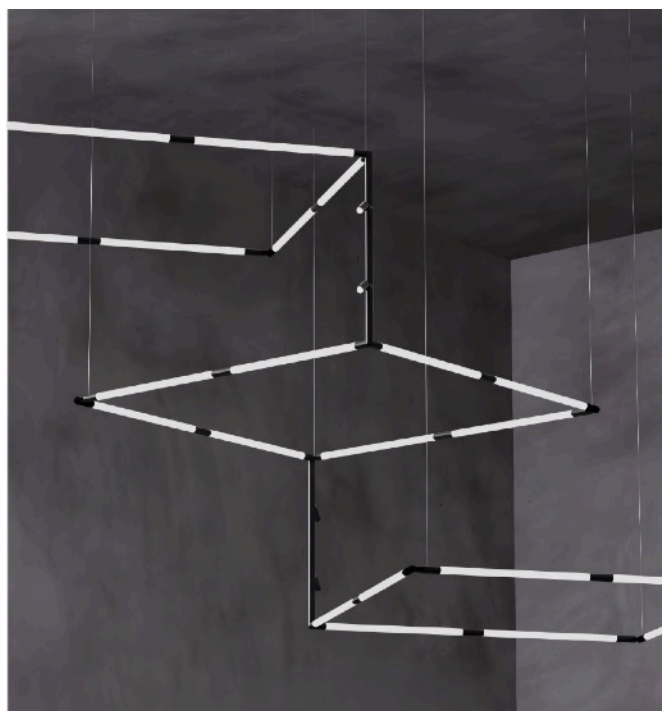


Diffused 360D Flood



DF15 - L 8W (640LM) / H 12W (960LM)
 DF28 - L (16W 1280LM) / H (22W 1760LM)
 DF36 - L (24W 1920LM) / H (30W 2400LM)
 DF48 - L (32W 2560LM) / H (37W 2960LM)

Diffused	Diameter	Shield	Output	CCT	Optic	Finish	Control
DF15 15"	LRG Large 1.25"	No Shield	L Low	27K 2700K	360D 360 Degree	BK Black	ND Non Dimming
DF28 28"			H High	30K 3000K		WH White	
DF36 36"				35K 3500K		RAL Custom	
DF48 48"				40K 4000K			

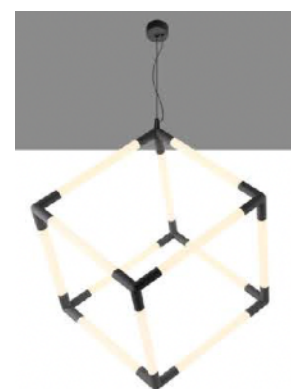

LINX

BINA COMPANYTM


ATTRAKT Lighting System

SEGMENTS




WW24 - 21W
 WW36 - 32W
 WW48 - 42W

Wall Wash	Diameter	Shield	Output	CCT	Optic	Finish	Control
WW24 24"	LRG Large 1.25"	No Shield	L Low	27K 2700K	20D 20 Degree	BK Black	ND Non Dimming
WW36 36"		NS Narrow Shield	H High	30K 3000K	40D 40 Degree	WH White	D10 0-10V
WW48 48"		WS Wide Shield		35K 3500K		RAL Custom	BN BubblyNet Wireless
WW## Custom				40K 4000K			

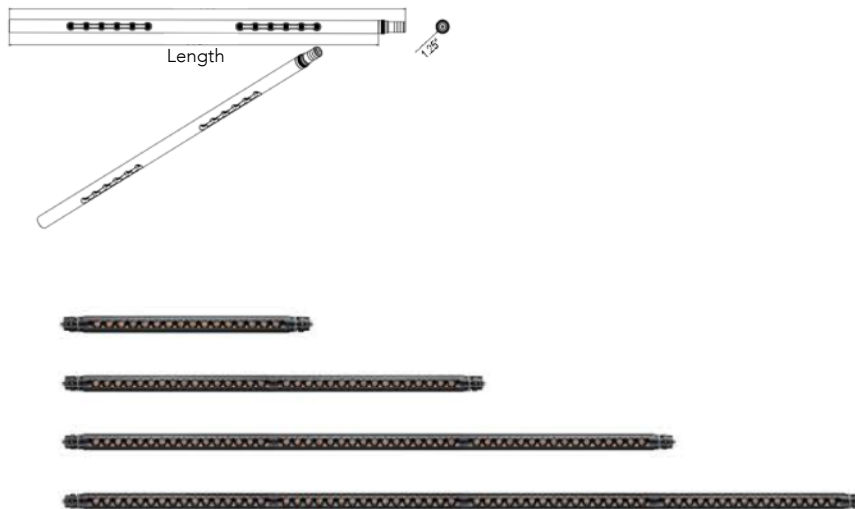

GR12 - 6W (390LM)
 GR24 - 12W (780LM)
 GR36 - 18W (1170LM)
 GR48 - 24W (1560LM)

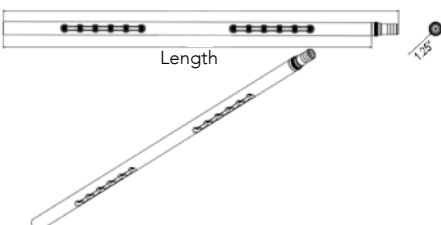

Grille	Diameter	Shield	Output	CCT	Optic	Finish	Control
GR12 12"	LRG Large 1.25"	No Shield	L Low	27K 2700K	12D 12 Degree	BK Black	ND Non Dimming
GR24 24"		NW Narrow Shield	H High	30K 3000K	24D 24 Degree	WH White	D10 0-10V
GR36 36"				35K 3500K	36D 36 Degree	RAL Custom	BN BubblyNet Wireless
GR48 48"				40K 4000K			
GR## Custom							



LINX

BINA COMPANY™



ATTRAKT Lighting System

LUMINAIRES



SUN

10W (800LM)
20W (1600LM)

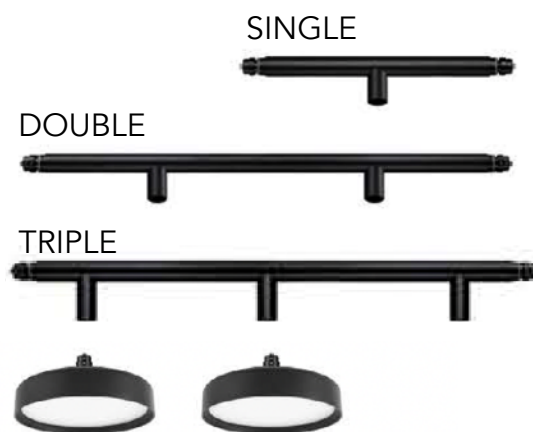

TUBE - LOW 5W (400LM) / HIGH 10W (800LM)



GLOBE - G4



4" Milky Glass




GLOBE PENDANT - G4P

LOW 5W - 250LM
HIGH 10W - 500LM

SPOT - S45




LOW 5W (390LM)
HIGH 10W (780LM)



SPOT - S55



LOW 8W (625LM)
HIGH 15W (1170LM)



Tube	Length	Output	CCT	Optic	Finish	Cable Length	Control
Tube	1L Single 2L Double 3L Triple	L Low (5W) H High (10W)	27K 2700K 30K 3000K 35K 3500K 40K 4000K	15D 15 Degree 24D 24 Degree 38D 38 Degree	WH Black WH Gold RAL Custom	# Length in inches	ND Non Dimming D10 0-10V BN BubblyNet Wireless

Globe	Length	Output	CCT	Optic	Finish	Cable Length	Control
G4 G4P Pendant	1L Single 2L Double 3L Triple	L Low (5W) H High (10W)	27K 2700K 30K 3000K 35K 3500K 40K 4000K	120D 120 Degree	WH Black WH White RAL Custom	# Length in inches	ND Non Dimming D10 0-10V BN BubblyNet Wireless

Spot	Length	Output	CCT	Optic	Finish	Control
S45 5W/10W S55 8W/15W	1L Single 2L Double 3L Triple	L Low H High	27K 2700K 30K 3000K 35K 3500K 40K 4000K	12D 12 Degree 24D 24 Degree 36D 36 Degree	BK Black WH White RAL Custom	ND Non Dimming D10 0-10V BN BubblyNet Wireless

Sun	Length	Output	CCT	Optic	Finish	Control
SN10 10W SN20 20W	1L Single 2L Double 3L Triple	L Low (10W) H High (20W)	27K 2700K 30K 3000K 35K 3500K 40K 4000K	110D 110 Degree	BK Black WH White RAL Custom	ND Non Dimming D10 0-10V BN BubblyNet Wireless


LINX

BINA COMPANYTM


ATTRAKT Lighting System

CONNECTORS


L-Corner




T-Connector




I-Connector



End-Cap Connector



3-Way Corner



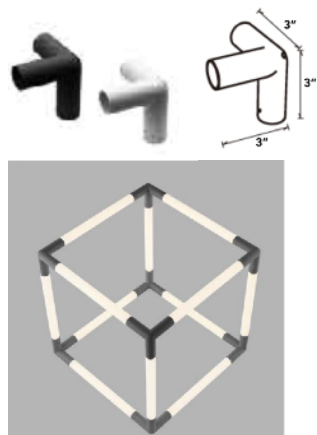


Knuckle Connectors


1-Way



2-Way

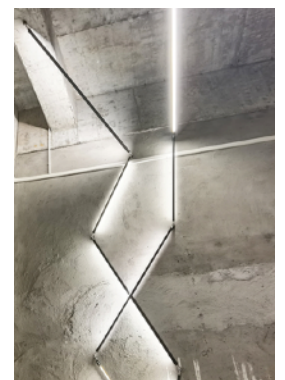

Non-lit Level Connectors

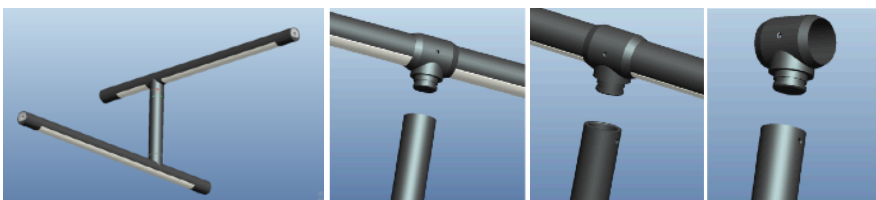

Non-lit Length Connectors



Non-Lit Connector	Quantity	Finish
LV##⁶ Level Connector	# Specify QTY	BK Black WH White RAL Custom
NLC##⁷ Non-lit length Connector		

Length of non-lit connectors can be customized.

⁵Used only for creating 3D shapes. Layout and design will be required.

⁶Specify length and Level (example Level 1 = LV12"). Layout and design will be required.

⁷Specify length (example NLC36"). Layout and design will be required.




LINX

BINA COMPANY


ATTRAKT Lighting System

POWER

Female Plug & Power Feed - FP

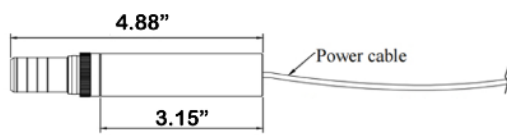

Male Plug & Power Feed - MP

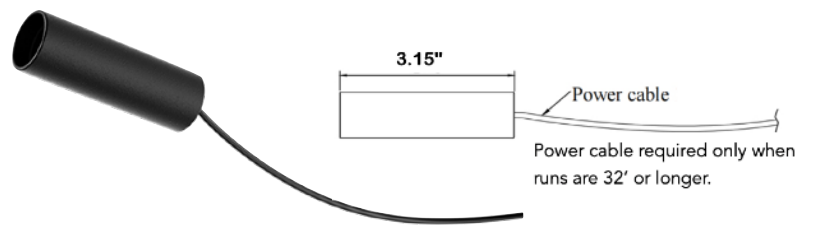

The number of female and male power feeds will be determined by the factory based on the design and system configuration/layout. You do not need to specify, however, a drawing or layout will be required.

MOUNTING

Suspension



Direct to wall or ceiling



Combination of suspended with cable and stem mounted.



Stem Mounted

2" or 4.5"



Recessed Canopy

Size of canopy will depend on driver

Surface Mount Canopy