



Luminaires

Wide selection of luminaires that work with both the LITHE and CATWALK lighting systems.

An assortment of spots, linear and decorative pendants in 48V DC

Dimmable down to 1% (0-10V) and DALI. Premium dimming (.1% 0-10V) available (consult factory).


Warm dimming and tunable white available (consult factory)

Fixtures click and lock into place



Spot Luminaires

ORDER CODE:

Zoomable Lens Spot

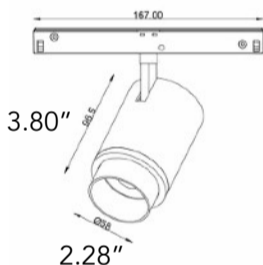

Zoom Lens - 15 - 55 degree

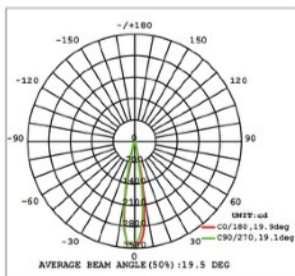

	Order Code	
Model	Z15	15W (1140-1215lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	Z	Zoomable Lens
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black
Accessory	HC	Honeycomb
	LS	Linear Spread






Spot Luminaires


Spots




S8




S12




S21



S23



S15A



Order Code		
Model	S8 S12 S21 S23 S15A	8W (560lm) 12W (840lm) 21W (1470lm) 22.5 (1725lm) 15W (1050lm)
Voltage	48V	48VDC
CRI	80 90	80Ra 90Ra
CCT	27K 30K 35K 40K D2W	2700K 3000K 3500K 4000K 3000-1800K
Beam	15D 24D 36D	15 degree 24 degree 36 degree
Dimming	10 DALI WLS	0-10V DALI Wireless / Bluetooth
Finish	WH BK	White Black
Accessory	HC LS CB	Honeycomb Linear Spread Cross Baffle



HC









LS



CB

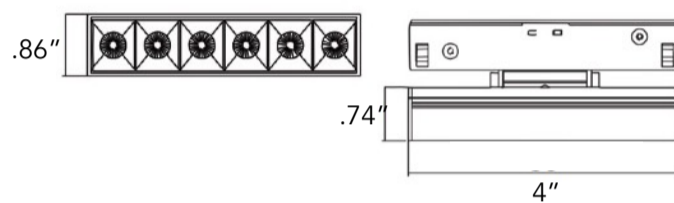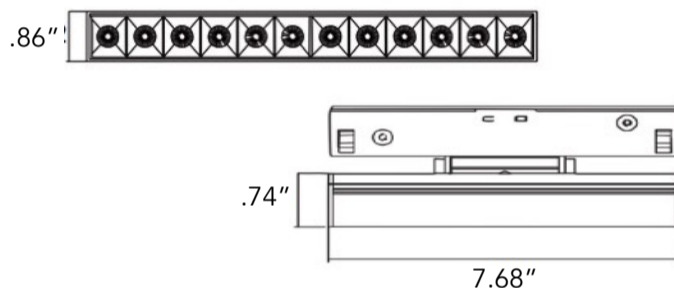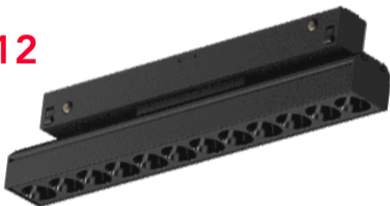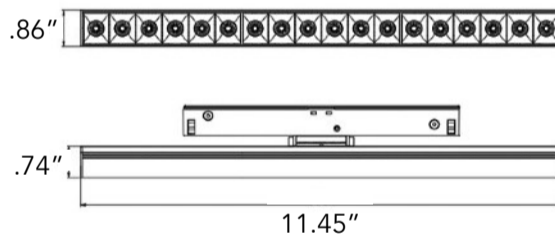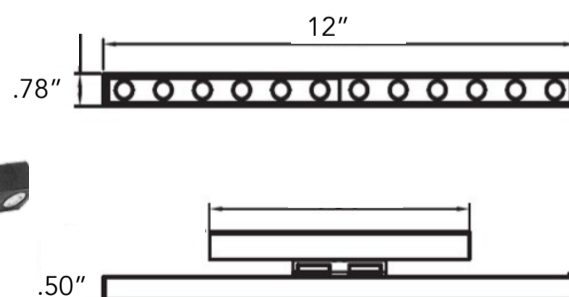






Linear Luminaires
Linear Baffle and Spotlight
LB6

LB12

LB18

LS6

LS12

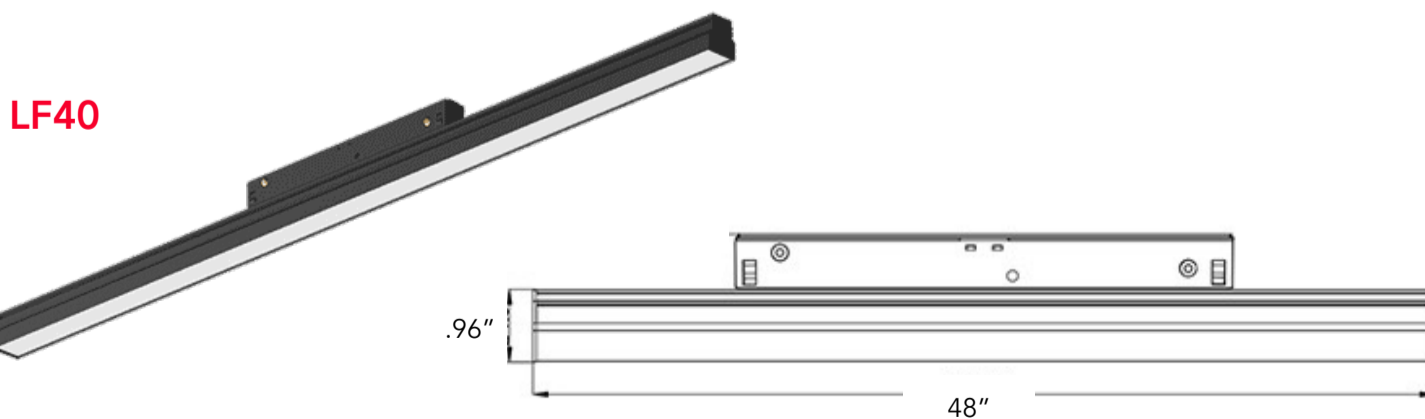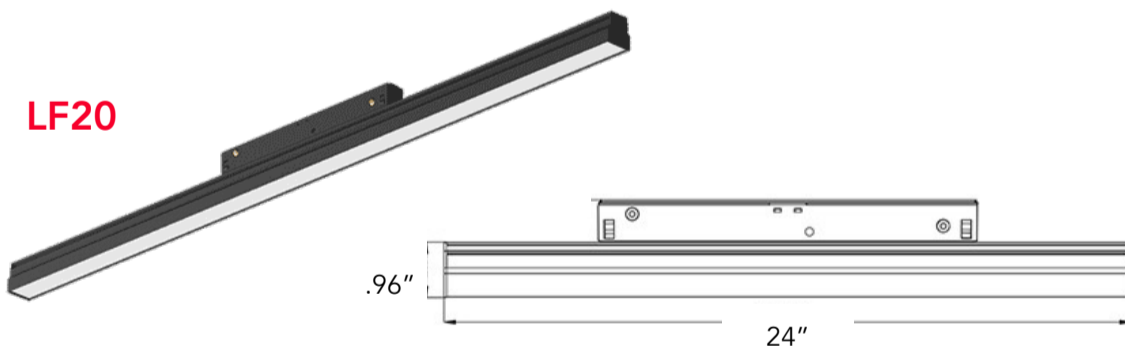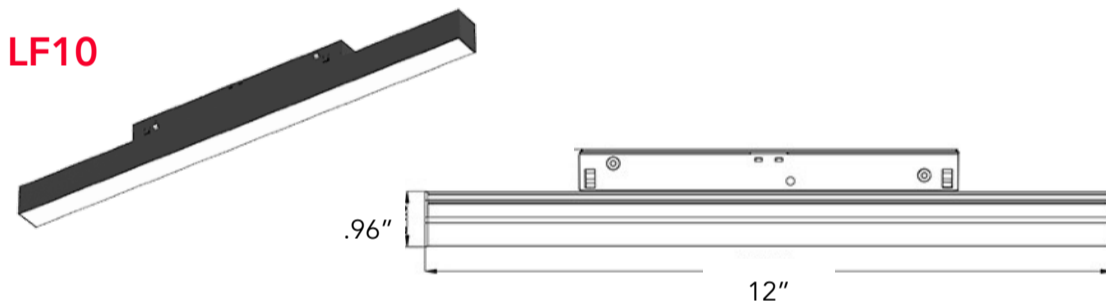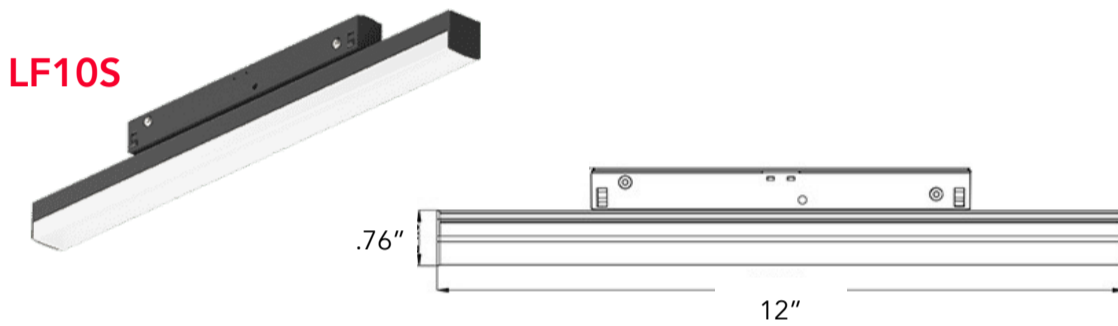Order Code

Model	LB6 LB12 LB18 LS6 LS12	6W (420lm) 12W (840lm) 18W (1260lm) 6W (480lm) 12W (1120lm)
Voltage	48V	48VDC
CRI	80 90	80Ra 90Ra
CCT	27K 30K 35K 40K D2W	2700K 3000K 3500K 4000K 3000-1800K
Beam LB Series	20D 34D 48D	20 degree 34 degree 48 degree
LS Series	25D 45D 60D	25 degree 45 degree 60 degree
Dimming	10 DALI WLS	0-10V DALI Wireless / Bluetooth
Finish	WH BK	White Black



Linear Luminaires

Linear Frost



Order Code

Model	LF10S	10W (600lm)
	LF10	10W (600lm)
	LF20	20W (1200lm)
	LF40	40W (2400lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	100D	LF10, LF20, LF40
	300D	LF10S
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black



Linear Luminaires

Light Bars

B10



1.5' Long

B20



3.5' Long

B30



5' Long

B40



7' Long

BU12



3.8' Long

Light Bar for indirect/up lighting only

Contact factory for custom lengths

Order Code



Model	B10	10W (600lm)
	B20	20W (1200lm)
	B30	30W (1800lm)
	B40	40W (2400lm)
	BU12	12W (600lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	D	Diffused
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black





Foldable Luminaires

Foldable



FB12

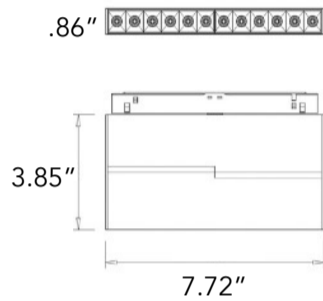



FB18

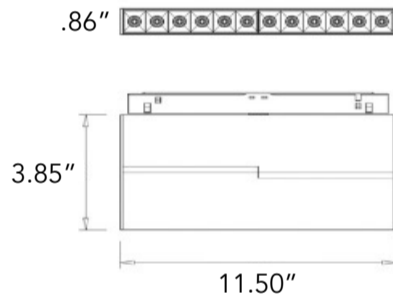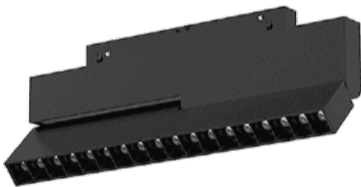

FF8

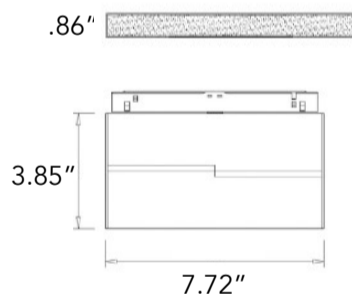

FF15

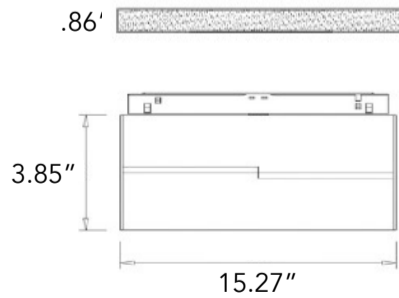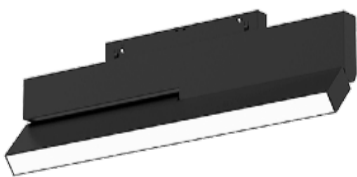

Order Code		
Model	FB12 FB18 FF8 FF15	12W (960lm) 18W (1260lm) 8W (480lm) 15W (900lm)
Voltage	48V	48VDC
CRI	80 90	80Ra 90Ra
CCT	27K 30K 35K 40K D2W	2700K 3000K 3500K 4000K 3000-1800K
Beam	25D 45D 60D 110D	25 degree 45 degree 60 degree Only FF Series
Dimming	10 DALI WLS	0-10V DALI Wireless / Bluetooth
Finish	WH BK	White Black

*Swivel mount base also available.


Add "SV" to model #






Wall Wash and Flexible Luminaires

SW15


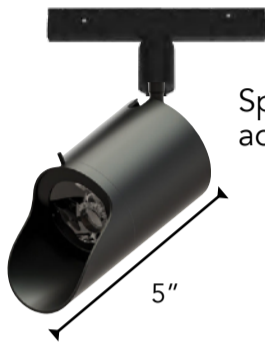


Spot with wall wash optic. 90 degree adjustment with 360 degree rotation

ASY20




DAS20

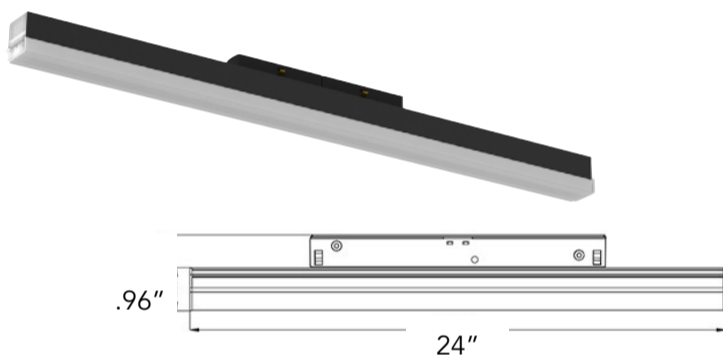

Asymmetric linear wall wash with single and dual polarized optic

ARM20

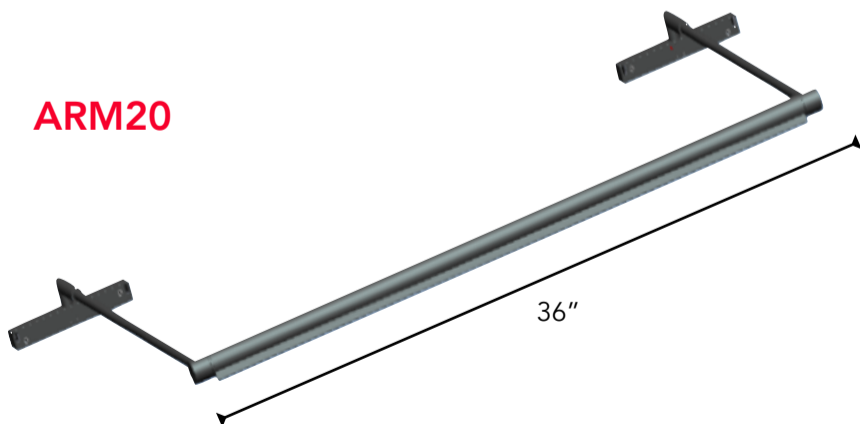

Single polarized wall washer with a rotatable bar, making it easy to aim the light where you need it.

Order Code

Model	SW15 ASY20 DAS20 ARM20 SC6 SC12 SC18 CH6	15W (1200lm) 20W (1600lm) 20W (1600lm) 20W (1550lm) 6W (210lm) 12W (420lm) 18W (840lm) 6W (480lm)
Voltage	48V	48VDC
CRI	80 90	80Ra 90Ra
CCT	27K 30K 35K 40K D2W	2700K 3000K 3500K 4000K 3000-1800K
CH Beam	25D 45D 60D	25 degree 45 degree 60 degree
All other series	----	Leave Blank
Dimming	10 DALI WLS	0-10V DALI Wireless / Bluetooth
Finish	WH BK	White Black

Flexible

SC6

SC12

SC18



12" Long

Soft Silicone for straight and curved track

CH6



6" Long

Flexible Chain for straight and curved track





Flexible Luminaires

Point Source

PS9



25D -25 degree only

PS10




PS20




Also available in:
GD - Gold



TAG46

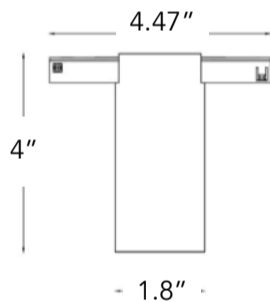

TAG55

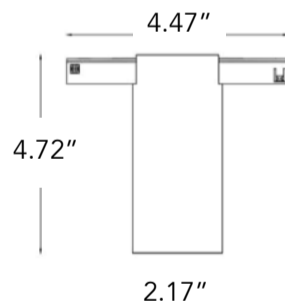

TAG55-S
TAG75-S

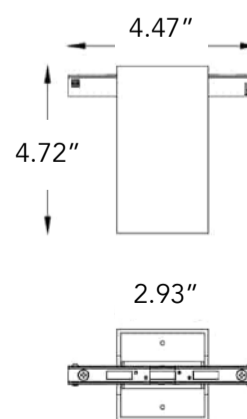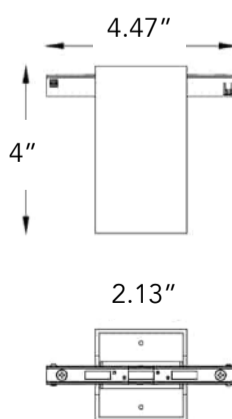

Order Code

Model	PS9	PS10	PS20	TAG46	TAG55	TAG55-S	TAG75-S
	9W (650LM)	10W (750LM)	20W (1500LM)	10W (600LM)	15W (900LM)	10W (600LM)	15W (900LM)
Voltage	48V	48V	48V	48V	48V	48V	48V
CRI	80	80	90	80	80	90	90
CCT	27K	30K	35K	40K	D2W	2700K	3000K
						3500K	4000K
						3000-1800K	
Beam	15D	24D	36D	15D	24D	36D	15D
				15 degree	24 degree	36 degree	
Dimming	10	DALI	WLS	0-10V	DALI	Wireless / Bluetooth	
Finish	WH	BK		White	Black		



PROJECT:

TYPE:

QTY:



Decorative Luminaires



Order Code		
Model	Tube8 Tube12 Cone Teardrop Globe Tube8HP Glass ConeXL	5W (250lm) 5W (250lm) 5W (225lm) 5W (500lm) 10W (650lm) 12W (1100lm) 15W (1100lm) 18W (780lm)
Voltage	48V	48VDC
CRI	80 90	80Ra 90Ra
CCT	27K 30K 35K 40K D2W	2700K 3000K 3500K 4000K 3000-1800K
Beam	15D 24D 36D	15 degree 24 degree 36 degree
Globe	D	Diffused
Dimming	10 DALI WLS	0-10V DALI Wireless / Bluetooth
Finish	WH BK	White Black
Glass	SM CL	Smokey Clear
Suspension	R C	Rod Cable/Wire
Length	XX"	Specify in inches



ATTRAKT

BINA COMPANY

Decorative Luminaires


Sun10

Sun20




Sun10 - 3.96"

Sun20 - 5.33"

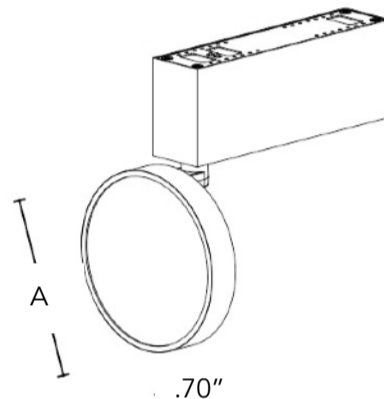

Sun20P

Sun35P

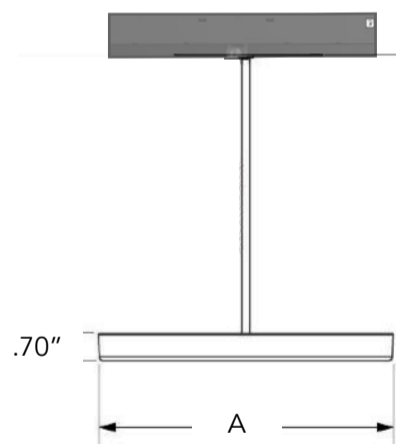

Sun20P - 10"

Sun35P - 17"

Order Code

Model	Sun10	Sun20	Sun20P	Sun35P						
	10W (840lm)	20W (1740lm)	20W (1740lm)	35W (2993lm)						
Voltage	48V	48VDC								
CRI	80	90	80Ra	90Ra						
CCT	27K	30K	35K	40K	D2W	2700K	3000K	3500K	4000K	3000-1800K
Beam	Leave blank	110 degree								
Dimming	10	DALI	WLS		0-10V	DALI	Wireless / Bluetooth			
Finish	WH	BK	GD		White	Black	Gold			
Stem 12P & 40P only	12	24	CS		12"	24"	Custom (specify in inches)			
Suspension	R	C			Rod	Cable/Wire				
Length	XX"				Specify in inches					

Ceiling Rod Length: 2" / 12" / 15.75" / 27.56" / Custom

Cable / Wire Length: Can be adjusted from 2" to 6'5".
Consult factory for longer lengths.

Installation

