




ELEMENT

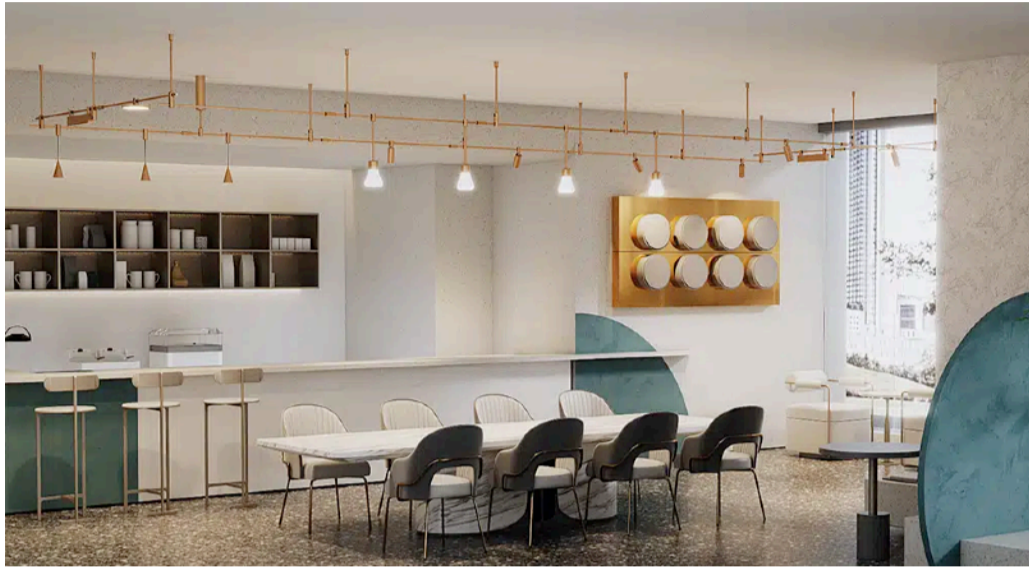

ELEMENT is a sophisticated lighting system with infinite possibilities.

Whether it is straight linear track, circular or hash tag cross over, you can use double and triple layers to create unique designs.

24VDC magnetic low voltage

No buzzing or humming

Dimmable down to 1% (0-10V) and DALI.

Premium dimming (.1% 0-10V) available (consult factory)

Warm Dimming and Tunable White available (consult factory)

SPECIFICATIONS


ORDERING CODE (Example): ELEMENT-HT-1C-GD-R12-VA12', VB12', HC 12', HD12' PLUS L2

Mounting	Ceiling	C	
	Wall	W	
Shape	Straight Run	SR	
	Square/Rectangle	SS	
	Criss Cross	CX	
	Hash Tag Cross	HT	
	Oval	OV	
	Circle	CC	
	Squircle	SC	square with radius corner
	Custom Pattern	CUS	
Control	0-10V	010	
	DALI	DAL	For individual control of luminaires, use DALI or Wireless control
Finish	Gold	GD	
	Pale Gold	PG	
	Silver	SV	
	Black	BL	
Suspension	Rod	R	2" / 4" / 6" / 12" / 24" / 36" / specify "
	Cable/Wire	C	Can adjust up to 6'5"
Run Lengths	Straight Run (in feet)	___'	
	Square/Rectangle	___' x ___' x ___' x ___'	
	Criss Cross Sections	(A) ___' (B) ___' (C) ___' (D) ___'	
	Hash Tag (Vertical)	(A) ___' (B) ___' (C) ___' (D) ___'	
	Sections (Horizontal)	(E) ___' (F) ___' (G) ___' (H) ___'	
	Circular Diameter	___'	

All cross sections will need to be identified and labeled

When doing multiple levels, use **"PLUS"** and then the level number to identify each level. Use the above to specify the next level's shape. Concept drawings and/or illustration will be required.

Multiple Levels	Level 2	PLUS - L2
	Level 3	PLUS - L3

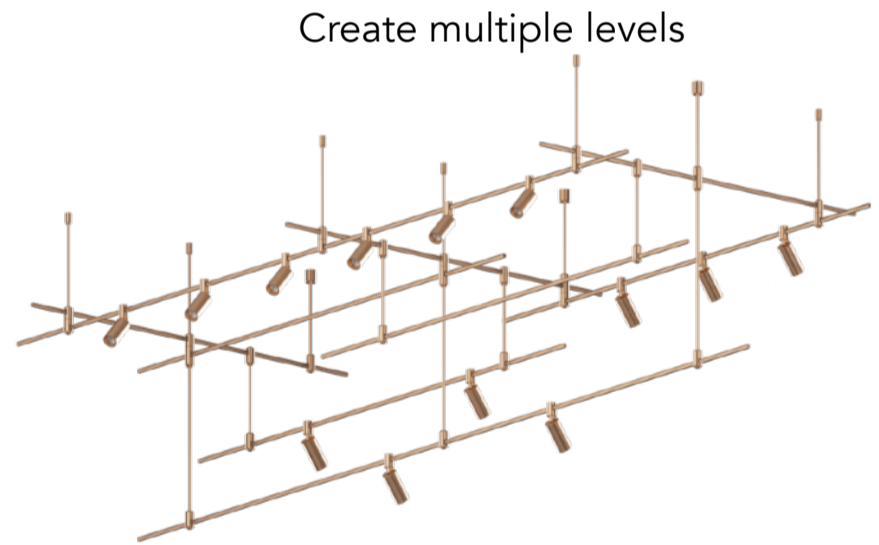

Choose from a variety of lighting modules to create an eclectic design. Mix and match track finish and fixture finishes, invite circular shapes and create multiple levels.



See **ELEMENT** Luminaire Spec Sheet

Factory will be responsible for determining number of power boxes, drivers, connectors, corners and other accessories needed (based on client's design intent). Please provide RCP and drawings showing full detail of runs.







ELEMENT




Track

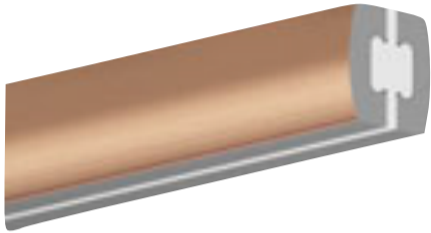


Radius corner

Ceiling Application

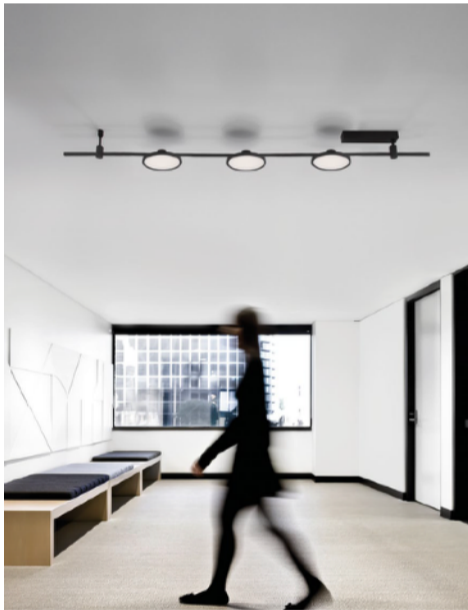

Ceiling Application with layers

Wall Application

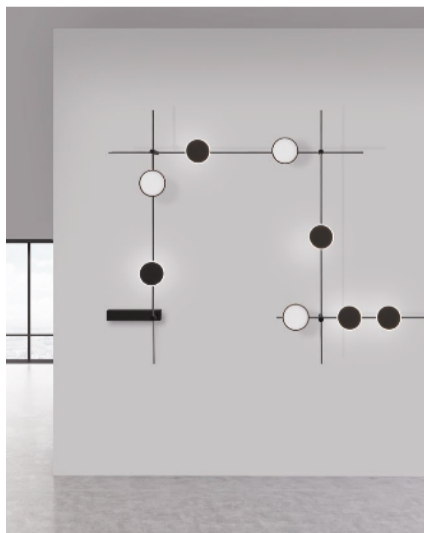



ELEMENT




Power & Mounting



Power box and support rod.

60W Driver

150W Driver




Side power supply

Up to 60" in length



Ceiling Driver Box- Decorative driver box installed on the ceiling used to house the power supply. Can be painted to match track system or ceiling.

Weight bearing rod

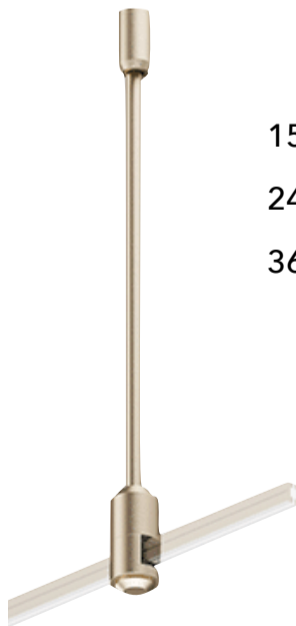


15" H

24" H

36" H

Weight bearing cable

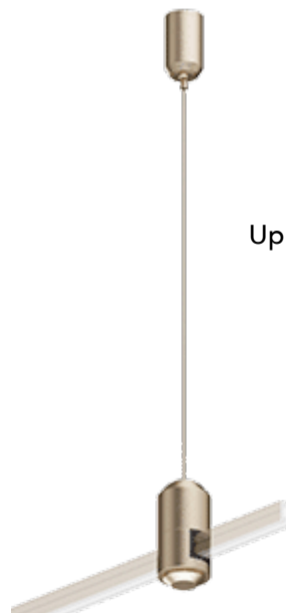

Up to 78" in length

All power, mounting, connectors and accessories for proper assembly will be determined by the factory.

Connectors

Double connector - conductive middle connector for joining two sections of track. Can be used to create two layer criss cross and hash tag cross. Comes in Rod or Cable option.

L-Connector - conductive connector for joining track in both vertical and horizontal orientation.

I Connector - conductor to connect two tracks.

Triple connector (conductive) for joining three sections of track.

Double-end conductive connector for creating an additional level

Monopoint connector

Monopoint connector

See luminaire spec sheet for available lighting modules

Use connector rods or cable for larger circular shapes

Shape Examples


Straight Run




Criss Cross



Hash Tag Cross

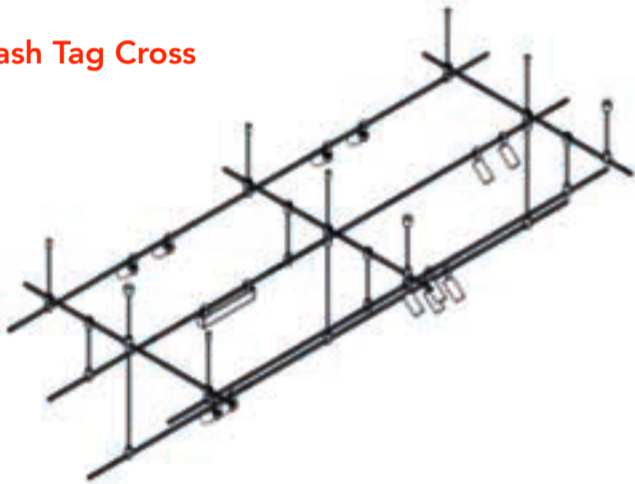

Oval

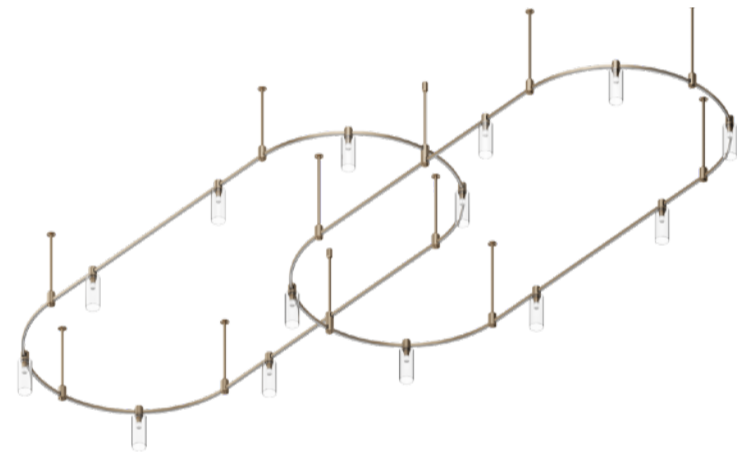

Square / Rectangle



Squircle and Circle

