LED-PIN-SW

BINA COMPANY

The Pinnacle LED series provides high performance in a small form factor, with lumen outputs ranging from 186lm/ft to over 800lm/ft. Available in color temperatures 2200K, 2700K, 3000K and 4000K, while maintaining 95+ CRI.

This specification grade product is perfect for a wide variety of both indoor and outdoor applications.

SPECIFICATIONS

CCT Output Chart

CCT	1.5W	3.0W	4.4W	6.0W	7.0W
2200K	149lm/ft	298lm/ft	438lm/ft	600lm/ft	697lm/ft
2700K	156lm/ft	313lm/ft	460lm/ft	630lm/ft	732lm/ft
3000K	164lm/ft	328lm/ft	482lm/ft	660lm/ft	767lm/ft
4000K	186lm/ft	373lm/ft	548lm/ft	750lm/ft	872lm/ft

Input Volt.	24V
PCB Width	10MM
CRI	>95
Cut Increment	1.97"
BIN	Single Bin
Dimming	0-10V/TRIAC
L70	50000+ Hrs
IP Rating	IP20/IP65
Operating Temp	-13-113°F

Ordering Code:

Series	Wattage		CCT		IP Rating		Wire-In		Wire-Out	
LED-PIN-SW	1.5	164 lm/ft*	22k	2200K	DRY	IP20	N/A	NO LEAD	N/A	NO LEAD
	3.0	328 lm/ft*	27k	2700K	WET	IP65	LEAD24	24" LEAD	LEAD24	24" LEAD
	4.4	482 lm/ft*	30k	3000K			LEAD72	72" LEAD	LEAD72	72" LEAD
	6.0	660 lm/ft*	40k	4000k			CON24	24" W/CONNECTOR	CON24	24" W/CONNECTOR
	7.0	767 lm/ft*					CON48	48" W/CONNECTOR	CON48	48" W/CONNECTOR
	*Based on 3000K/DRY						CON72	72" W/CONNECTOR	CON72	72" W/CONNECTOR

Ordering Code Example: LED-PIN-SW-1.5-27K-DRY-LEAD24-N/A

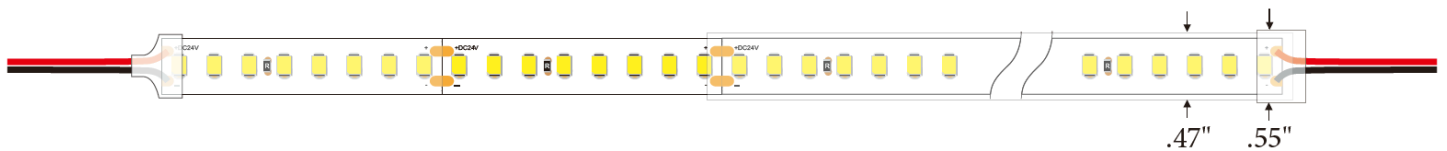# LED-PIN-SW

BINA COMPANY

COMPATIBLE EXTRUSIONS

	CH-STD-1707	CH-STD-2507	CH-STD-1715	CH-STD-2515	CH-STD-1919	CH-STD-1616	CH-STD-1616S	CH-S-1919	CH-S-1616	CH-S-1616B	CH-L-2310	CH-L-2810	CH-L-3030E
DRY	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
WET								✔	✔	✔	✔	✔	✔

IP20 LED Strip

IP67 LED Strip

LED-PIN-SW

BINA COMPANY
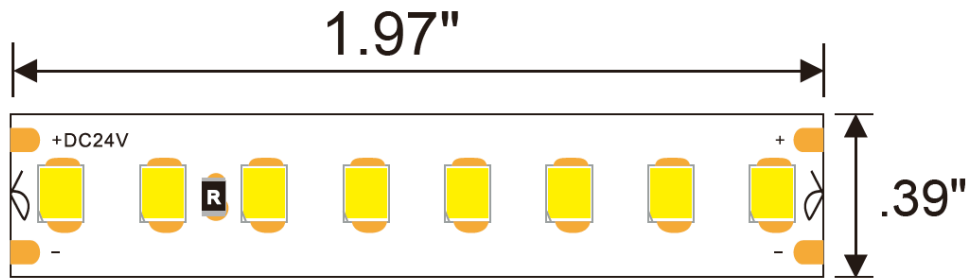
CONNECTOR/WIRE - IN/OUT

Bare Wire Lead	IP20 Connector	IP20 Connector
20 AWG WIRE	Male Connector	Female Connector

POWER SUPPLIES

DRV-DD-**-UNV-24

Dynamic Driver

ACCESSORIES

Power Snap Connector	Joiner Snap Connector	Mounting Strap
Wire to LED Strip	LED Strip to Strip Connector	LED Mounting Strap (Without Channel)