

PROJECT:

TYPE:

QTY:

LED-PINHE-SW



The Pinnacle HE LED series provides high performance in a small form factor, with lumen outputs ranging from 490lm/ft to over 2862lm/ft. Available in color temperatures of 2200K, 2700K, 3000K and 4000K, while maintaining 95+ CRI.



The tight pitch of the Pinnacle HE LED's make this product perfect for applications where avoiding diode pixelation is a must, such as undercabinet, kitchen and direct view installations.

SPECIFICATIONS

CCT Output Chart

CCT	1.5W	3.0W	4.4W	6.0W	7.0W
2200K	490lm/ft	298lm/ft	438lm/ft	600lm/ft	697lm/ft
2700K	156lm/ft	313lm/ft	460lm/ft	630lm/ft	732lm/ft
3000K	164lm/ft	328lm/ft	482lm/ft	660lm/ft	767lm/ft
4000K	186lm/ft	373lm/ft	548lm/ft	750lm/ft	872lm/ft

Input Volt.	24V
PCB Width	10MM
CRI	>95
Cut Increment	.98"
BIN	Single Bin
Dimming	0-10V/TRIAC
L70	50000+ Hrs
IP Rating	IP20/IP65
Operating Temp	-13-113°F

Ordering Code:

Series	Wattage		CCT		IP Rating		Wire-In		Wire-Out	
	LED-PINHE-SW	1.5	539 lm/ft*	22k	2200K	DRY	IP20	N/A	NO LEAD	N/A
	3.0	1078 lm/ft*	27k	2700K	WET	IP65	LEAD24	24" LEAD	LEAD24	24" LEAD
	4.4	1584 lm/ft*	30k	3000K			LEAD72	72" LEAD	LEAD72	72" LEAD
	6.0	2167 lm/ft*	40k	4000k			CON24	24" W/CONNECTOR	CON24	24" W/CONNECTOR
	7.0	2862 lm/ft*					CON48	48" W/CONNECTOR	CON48	48" W/CONNECTOR
							CON72	72" W/CONNECTOR	CON72	72" W/CONNECTOR

Ordering Code Example: LED-PINHE-SW-1.5-27K-DRY-LEAD24-N/A



info@binacompany.com | 305.735.3114 | www.binacompany.com

In an effort to offer the best product possible, we reserve the right to change specification or material of the product without notice.

PROJECT:














TYPE:

QTY:


LED-PINHE-SW




COMPATIBLE EXTRUSIONS

														
	CH-STD-1707	CH-STD-2507	CH-STD-1715	CH-STD-2515	CH-STD-1919	CH-STD-1616	CH-STD-1616S	CH-S-1919	CH-S-1616	CH-S-1616B	CH-L-2310	CH-L-2810	CH-L-3030E	
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WET								✓	✓	✓	✓	✓	✓	✓

IP20 LED Strip

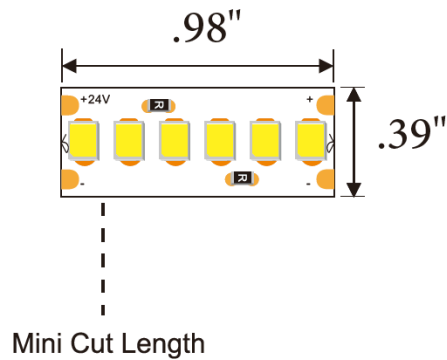

IP67 LED Strip

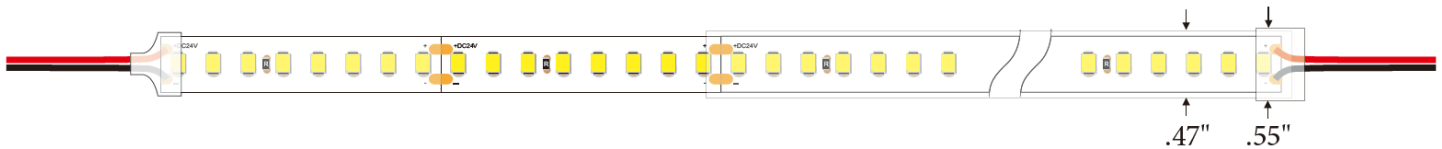

PROJECT:

TYPE:

QTY:

LED-PINHE-SW



CONNECTOR/WIRE - IN/OUT

Bare Wire Lead



20 AWG WIRE

IP20 Connector



Male Connector

IP20 Connector



Female Connector

POWER SUPPLIES

DRV-DD-**-UNV-24



Dynamic Driver

ACCESSORIES

Power Snap Connector



Wire to LED Strip

Joiner Snap Connector



LED Strip to Strip Connector

Mounting Strap



LED Mounting Strap (Without Channel)