


SCOUT

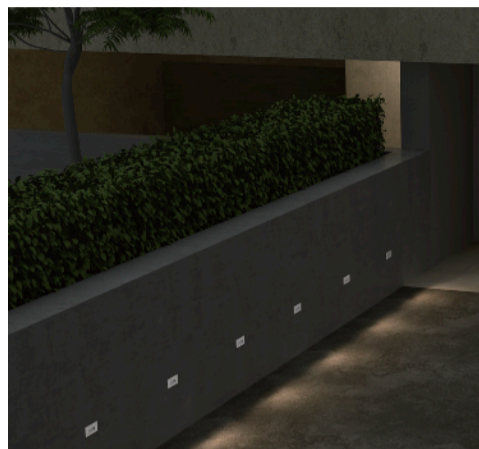

Recessed step/wall light with a screwless design faceplate made out of chrome-plated 316# stainless steel.

The faceplate securely clips into the housing without the use of screws.

Housing/mounting sleeve features metal brackets on the bottom preventing it from shifting while pouring the concrete. This allows for an easy installation.


Offered with optional diffused cover (both UV resistant and fireproof PC).

IP65 Rated.

SPECIFICATIONS



Smooth
104LM

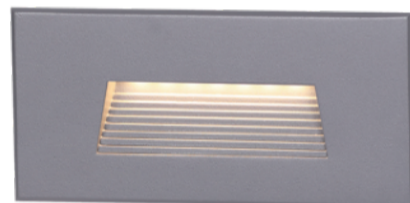

Stepped
104LM



Louvered
38LM

Input Voltage	24V DC / 120V
Wattage	3.5W/ 4.8W
Delivered Lumens	85LM - 105LM
CCT	2000K, 3000K, 4000K
Material	Die-cast powder coated aluminum
IK Rating	10
Dimming	Phase & 0-10v (100%-5%)
Lamp Life	50,000Hr
Environment	IP65 / cable gland IP67
Operating Temp	-4° F - 104° F



Dark Grey #7036



Silver Grey #9022



Black #9005

Ordering Code:

Series	Style	PC Cover	CCT	Finish	Dimming	Voltage
SCOUT	SM Smooth	Blank	20K 2000K	BK Black	ELV ELV/TRIAC Phase Cutting	24V 24V DC
	ST Stepped	D Diffused	30K 3000K	DG Dark Grey	D10 0/1-10V	120V 120V AC
	LV Louvered		40K 4000K 60K 6000K	SG Silver Grey	DAL DALI-2	







Optional Diffused Cover



SCOUT



MOUNTING SLEEVE

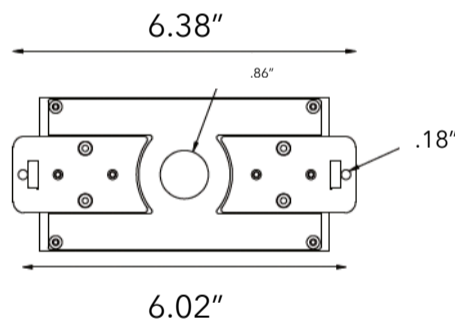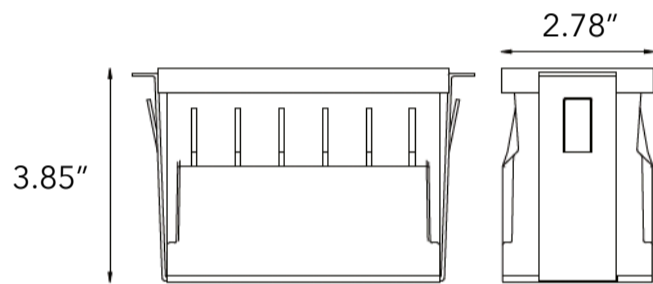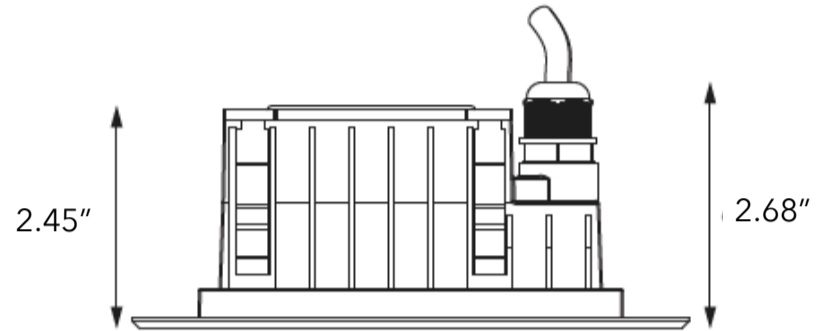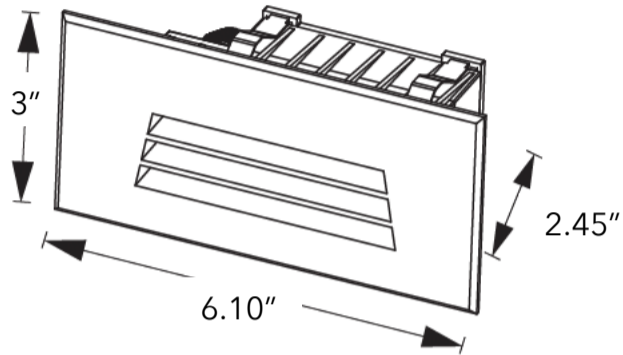

Clip in design



Mounting sleeve features bracket on bottom to prevent the housing from shifting while pouring the concrete.

