

Luminaires

Wide selection of luminaires that work with both the LITHE and CATWALK lighting systems.

An assortment of spots, linear and decorative pendants in 48V DC

Dimmable down to 1% (0-10V) and DALI. Premium dimming (.1% 0-10V) available (consult factory).


Warm dimming and tunable white available (consult factory)

Fixtures click and lock into place



Spot Luminaires

ORDER CODE:

Zoomable Lens Spot



Zoom Lens - 15 - 55 degree



Order Code		
Model	Z15	15W (1140-1215lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	Z	Zoomable Lens
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black
Accessory	HC	Honeycomb
	LS	Linear Spread




Spot Luminaires


Spots




S8




S12
S15

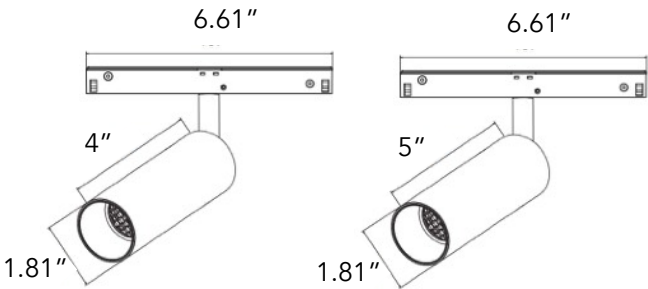


S21



S23



S15A



Order Code

Model	S8	8W (560lm)
	S12	12W (840lm)
	S15	15W (1260LM)
	S21	21W (1470lm)
	S23	22.5 (1725lm)
	S15A	15W (1050lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	15D	15 degree
	24D	24 degree
	36D	36 degree
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black
Accessory	HC	Honeycomb
	LS	Linear Spread
	CB	Cross Baffle



HC



LS





CB





Linear Luminaires

Linear Baffle and Spotlight


LB6

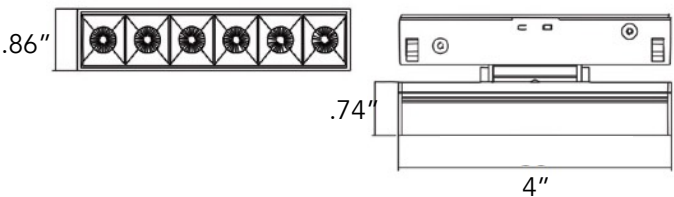


LB12

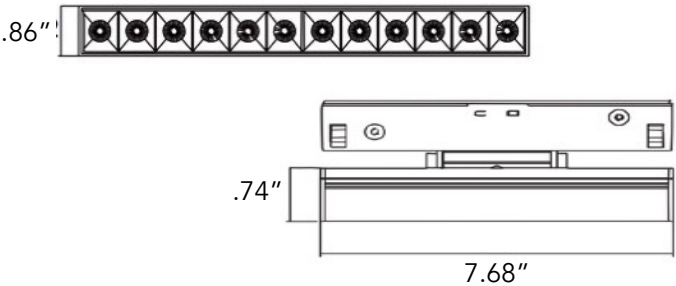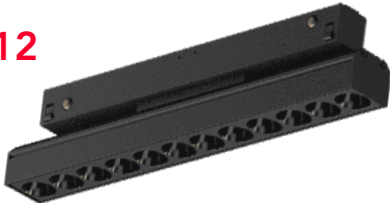


LB18

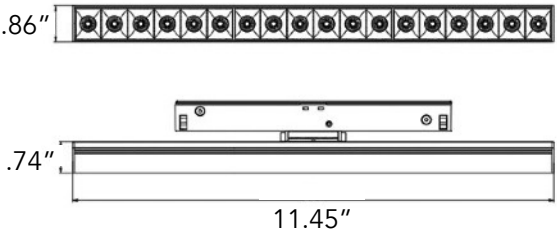

LS6



LS12

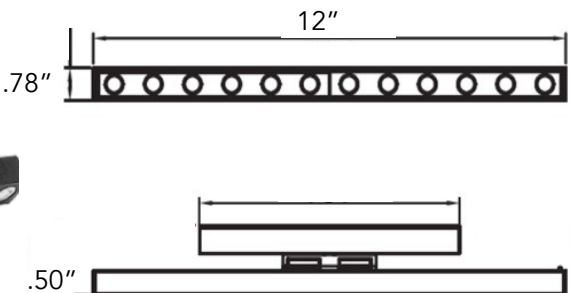

Order Code





Model	LB6	6W (420lm)
	LB12	12W (840lm)
	LB18	18W (1260lm)
	LS6	6W (480lm)
	LS12	12W (1120lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam LB Series	20D	20 degree
	34D	34 degree
	48D	48 degree
LS Series	25D	25 degree
	45D	45 degree
	60D	60 degree
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black





Linear Luminaires

Linear Frost

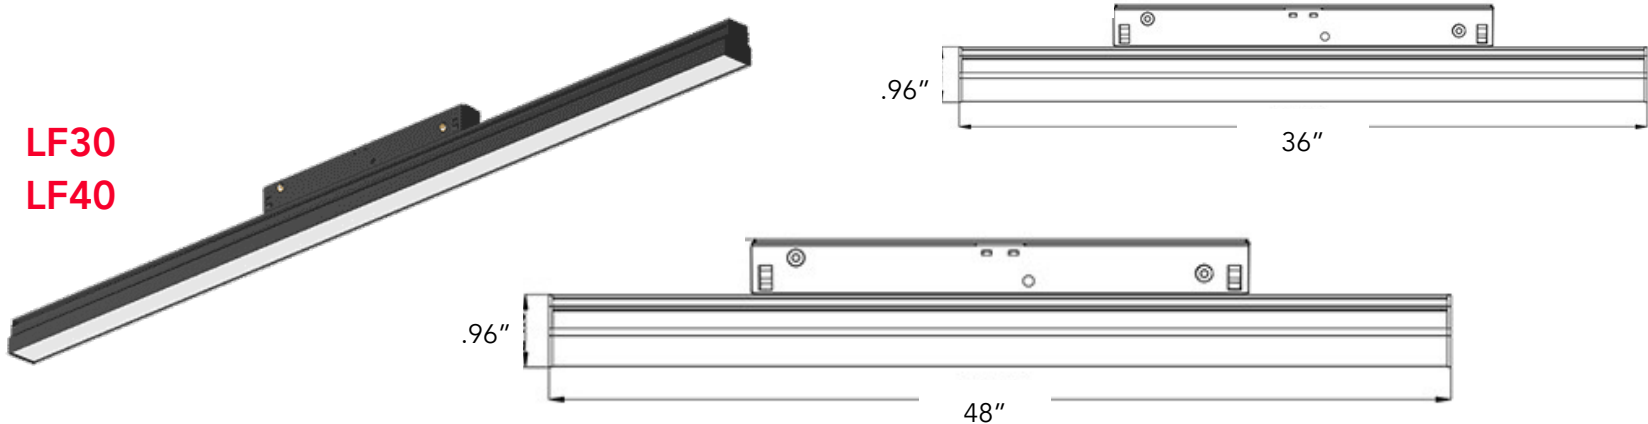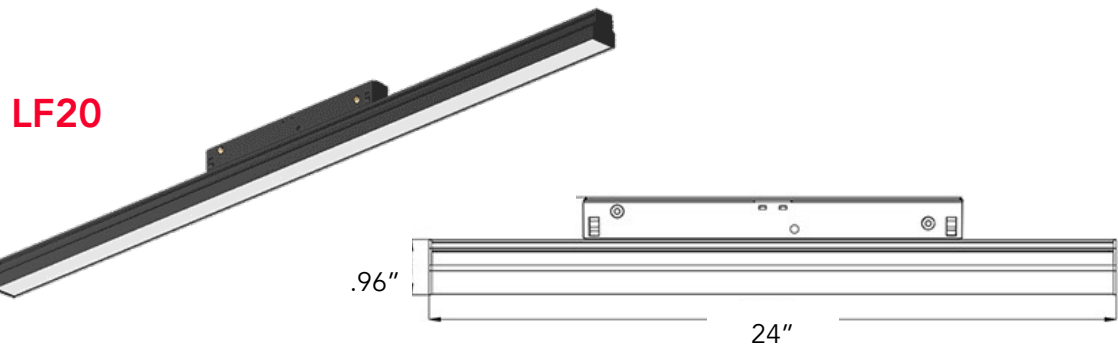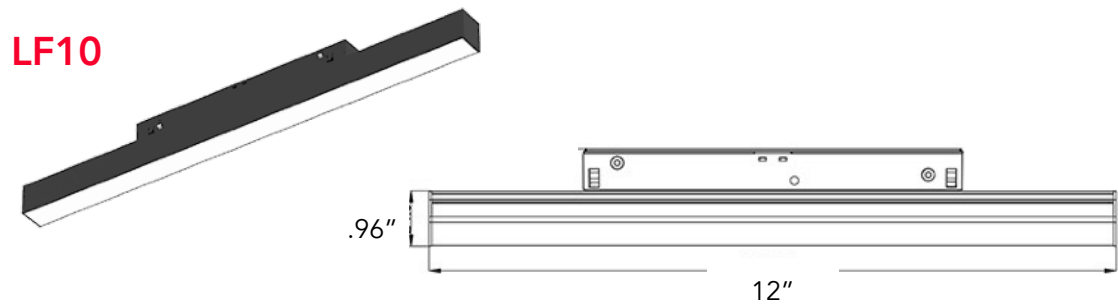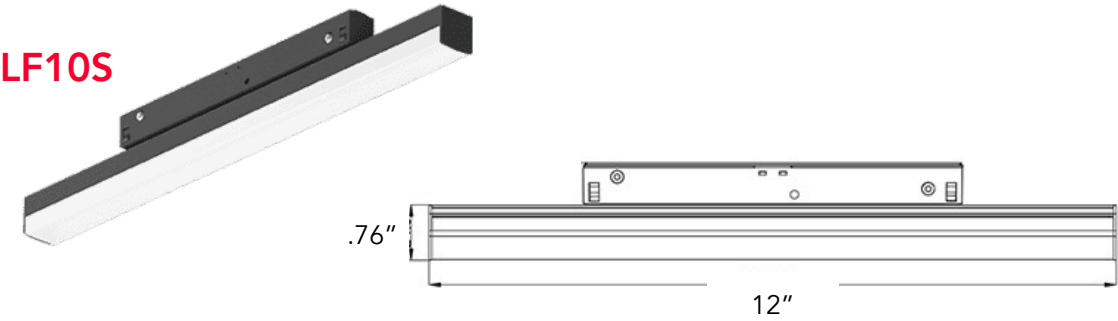

Order Code		
Model	LF10S	10W (600lm)
	LF10	10W (600lm)
	LF20	20W (1200lm)
	LF30	30W (1800lm)
	LF40	40W (2400lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	100D	LF10, LF20, LF40
	300D	LF10S
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black





Linear Luminaires

Light Bars

B10



B20



B30



B40



BU12



Light Bar for indirect/up lighting only

Contact factory for custom lengths



Order Code		
Model	B10 B20 B30 B40 BU12	10W (600lm) 20W (1200lm) 30W (1800lm) 40W (2400lm) 12W (600lm)
Voltage	48V	48VDC
CRI	80 90	80Ra 90Ra
CCT	27K 30K 35K 40K D2W	2700K 3000K 3500K 4000K 3000-1800K
Beam	D	Diffused
Dimming	10 DALI WLS	0-10V DALI Wireless / Bluetooth
Finish	WH BK	White Black





Foldable Luminaires

Foldable



FB12





FB18

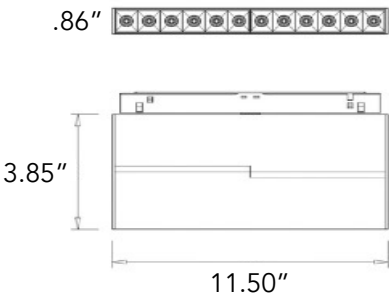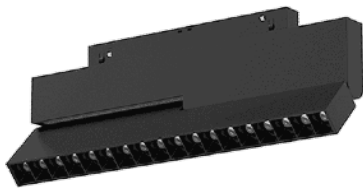

FF8



FF15

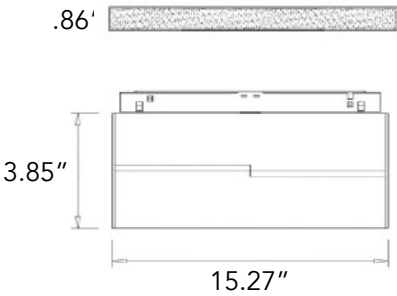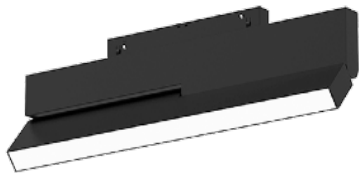

Order Code		
Model	FB12	12W (960lm)
	FB18	18W (1260lm)
	FF8	8W (480lm)
	FF15	15W (900lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	25D	25 degree
	45D	45 degree
	60D	60 degree
	110D	Only FF Series
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black

*Swivel mount base also available.
Add "SV" to model #





Wall Wash and Flexible Luminaires

SW15





Spot with wall wash optic. 90 degree adjustment with 360 degree rotation

ASY20




DAS20

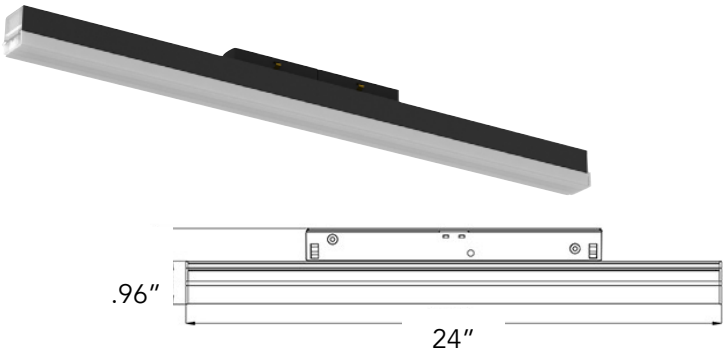

Asymmetric linear wall wash with single and dual polarized optic

ARM20

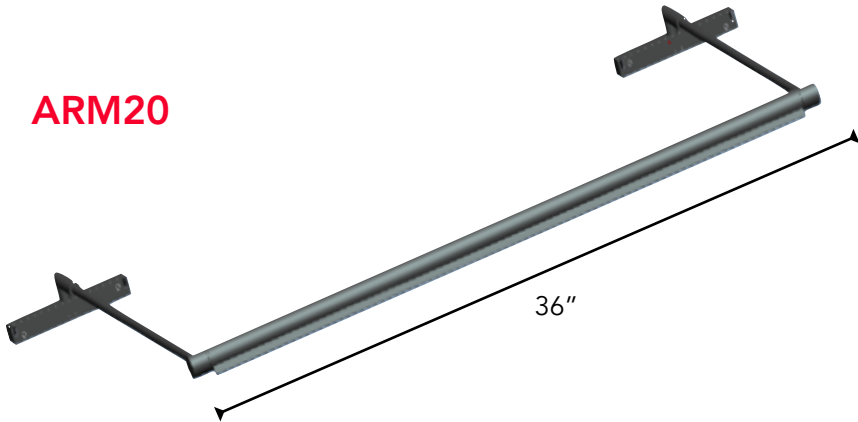

Single polarized wall washer with a rotatable bar, making it easy to aim the light where you need it.

Order Code

Model	SW15	15W (1200lm)
	ASY20	20W (1600lm)
	DAS20	20W (1600lm)
	ARM20	20W (1550lm)
	SC6	6W (210lm)
	SC12	12W (420lm)
	SC18	18W (840lm)
	CH6	6W (480lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
CH Beam	25D	25 degree
	45D	45 degree
	60D	60 degree
All other series	----	Leave Blank
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black

Flexible

SC6

SC12

SC18



12" Long

Soft Silicone for straight and curved track

CH6



6" Long

Flexible Chain for straight and curved track





Flexible Luminaires

Point Source

PS9



25D -25 degree only

PS10



PS20



Also available in:
GD - Gold






TAG46



TAG55



TAG55-S
TAG75-S

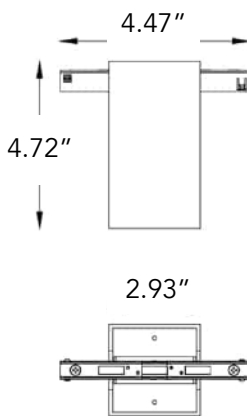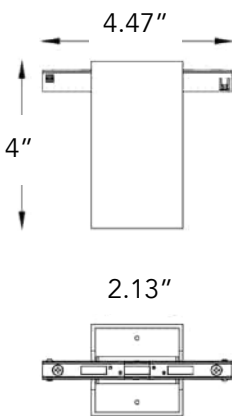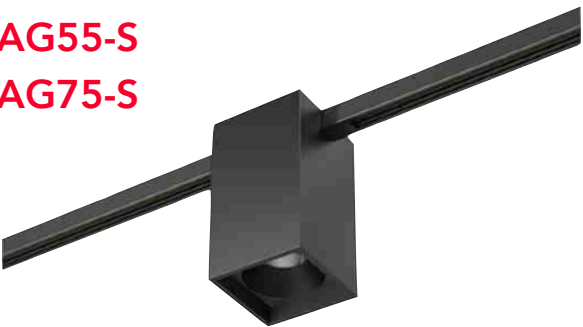

Order Code

Model	PS9	9W (650LM)
	PS10	10W (750LM)
	PS20	20W (1500LM)
	TAG46	10W (600LM)
	TAG55	15W (900LM)
	TAG55-S	10W (600LM)
	TAG75-S	15W (900LM)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	15D	15 degree
	24D	24 degree
	36D	36 degree
Dimming	10	0-10V
	DALI	DALI
	WLS	Wireless / Bluetooth
Finish	WH	White
	BK	Black



PROJECT:

TYPE:

QTY:



Decorative Luminaires

Tube

8"

Ø20

.79"

Glow-Tube

13"

26"

39"

Tube 8HP

8"

1.81"

Cone

4.3"

Teardrop

3"

Globe

5"

Glass

Glass can be 4" - 7.9"

5"

Cone XL

12"

	Order Code	
Model	Tube8	5W (250lm)
	Tube12	5W (250lm)
	Glow-Tube13	10W (550lm)
	Glow-Tube26	20W (1100lm)
	Glow-Tube39	25W (1375lm)
	Cone	5W (225lm)
	Teardrop	5W (500lm)
	Globe	10W (650lm)
	Tube8HP	12W (1100lm)
	Glass	15W (1100lm)
	ConeXL	18W (780lm)
Voltage	48V	48VDC
CRI	80	80Ra
	90	90Ra
CCT	27K	2700K
	30K	3000K
	35K	3500K
	40K	4000K
	D2W	3000-1800K
Beam	15D	15 degree
	24D	24 degree
	36D	36 degree
	*D	Diffused
Dimming	10	0-10V
	DALI	DALI
Glass	WLS	Wireless / Bluetooth
Finish	WH	White
Suspension	BK	Black
	SM	Smokey
	CL	Clear
Cable Length	XX"	Specify in inches






Decorative Luminaires


Sun10

Sun20

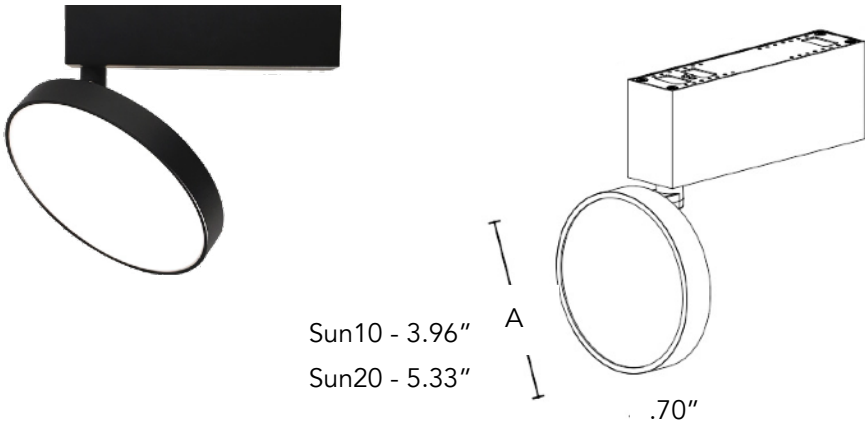

Sun20P

Sun35P

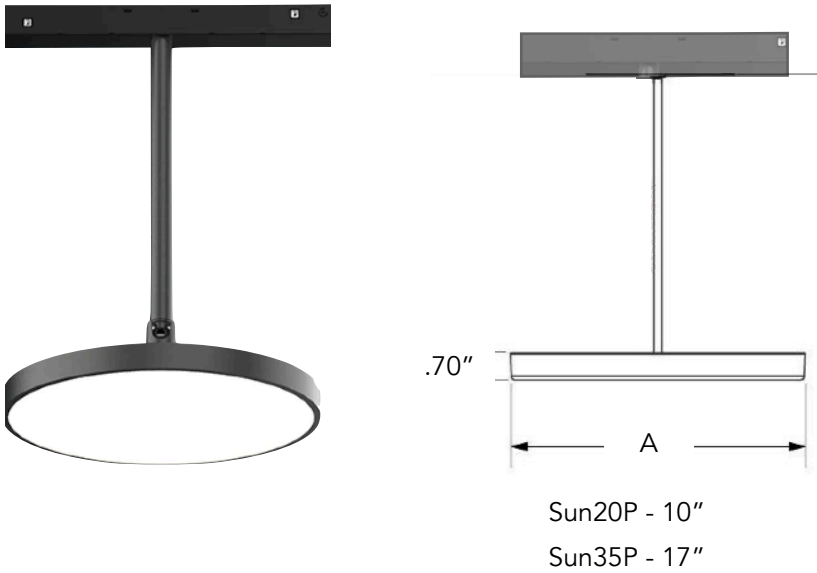

Order Code		
Model	Sun10 Sun20 Sun20P Sun35P	10W (840lm) 20W (1740lm) 20W (1740lm) 35W (2993lm)
Voltage	48V	48VDC
CRI	80 90	80Ra 90Ra
CCT	27K 30K 35K 40K D2W	2700K 3000K 3500K 4000K 3000-1800K
Beam	Leave blank	110 degree
Dimming	10 DALI WLS	0-10V DALI Wireless / Bluetooth
Finish	WH BK GD	White Black Gold
Stem 12P & 40P only	12 24 CS	12" 24" Custom (specify in inches)
Suspension	R C	Rod Cable/Wire
Length	XX"	Specify in inches

Ceiling Rod Length: 2" / 12" / 15.75" / 27.56" / Custom
Cable / Wire Length: Can be adjusted from 2" to 6'5".
Consult factory for longer lengths.



Installation

